

\* incl. 20 [-5; +30] mm pull out

3D model is available on request or [www.hyva.com](http://www.hyva.com)

Specifications		Max. pump flow		Tipping time	
Max. working pressure	250 bar	With KO <sup>1</sup>	122 L/min	With KO <sup>1</sup>	11 sec
Weight	100 kg	Without KO <sup>1</sup>	86 L/min	Without KO <sup>1</sup>	15 sec
Working volume	22 L	With KO <sup>1</sup> below -20°C	85 L/min	With KO <sup>1</sup> below -20°C	16 sec
Total volume	24 L	Without KO <sup>1</sup> below -20°C	60 L/min	Without KO <sup>1</sup> below -20°C	21 sec
Max. cyl. load (start tipping)	195 kN			Allowable lowering time	11 sec
Max. cyl. load (end of stroke) <sup>2</sup>	97 kN				
Max. cyl. load (end of stroke) <sup>3</sup>	113 kN				

### Technical notes

- This cylinder is a lifting device only.
- It should not be used as a structural member and should not be subjected to side loads.
- Tipping valve must have a pressure relief at the cylinder port set not higher than max. working pressure.
- Verify max. cyl. load.
- Working temperature range is between -40°C and +80°C.
- Max. duration of extension is 0.5 hours (excluded hard chromed stages).
- Cylinder is painted black (RAL9005) with a min. thickness conforming to the 480 hours neutral salt spray test as per ISO 9227.
- <sup>1</sup> Hyva knock-off.
- <sup>2</sup> Unsubstantial unloading (sticky load).
- <sup>3</sup> Substantial unloading.

### Related documentation


Bracket options:	015BRA10 & 015BRA13
Mounting instructions:	CYL-0031
Oil specifications:	OIL-0011
Spec sheet explanation:	CYL-0041

### Configuration

Extension	1	2	3	4	5	6	7	Total
Effective diameter [mm]	110	91	72					3235
Stroke* [mm]	1065	1085	1085					

### Tipping weight

For detailed tipping calculations please refer to: <https://tipper.hyva.com>




BL body length  
OH rear overhang  
Ycog vert. pos. centre of gravity  
Qo pivot length  
C bracket length  
At tipping angle  
 $stroke \times 60 / Qo$


BL [mm]	200	4300		200	4200		200	4100	
OH [mm]	46	400	600	47	400	600	48	400	600
At [°]	46	48	51	47	50	53	48	51	54
Ycog [mm]									
C [mm]	28	30	34	28	31	35	28	32	36
At [°]	31	35	40	31	36	42	32	37	44
	35	40	49	36	42		37	44	

Tipping weight [ton] at maximum pressure of 250 bar for a vertically mounted cylinder and C is 158 mm

Pos.	Part no.	Description	Qty.
C01	71839100	DUST COVER FE 110-3/118-3	1
P01	74461301	PISTON FL3 S 072-1280-HC	1
P02	71853072K	SLIDER FL 072 (2 X 1/2) A22	2
P04	71822072	BOTTOM PLATE PISTON FL 072	1
P05	01745026K	CIRCLIP 63 DIN 472 (67.2x2.0)	1
P06	71870210K	O-RING PISTON BOTTOM 072	1
P07	71847100	PISTON EYE SPH. FL3 072 L=075	1
P08	01226420K	O-RING 53.57 X 3.53 MM	1
P09	71875450K	SPHERICAL BEARING D.50.3 MAINT. FREE	1
P10	01770560K	CIRCLIP 75 DIN 472 (79.5x2.5)	1
P11	71875012	PIN ROUND HEAD GROOVED 8x15 mm	2

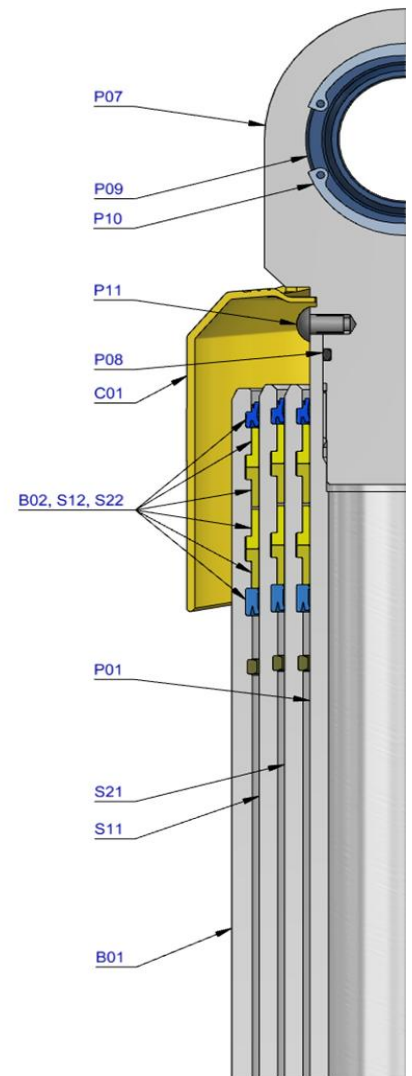

S21	74602301	STAGE FL2 091-1275-HC	1
S22	71802091K	PACKSET FL 091	1
S23	71853091K	SLIDER FL 091 (2 X 1/2) A22	1
S24	71851091K	OUTER STOPRING FL 091 A22	1
S25	71852091K	LIFTRING FL 091 A22	1
S11	74603301	STAGE FL2 110-1275-HC	1
S12	71802110K	PACKSET FL 110	1
S13	71853110K	SLIDER FL 110 (2 X 1/2) A22	1
S14	71851110K	OUTER STOPRING FL 110 A22	1
S15	71852110K	LIFTRING FL 110 A22	1
B01	74504300	BASE FL2 129-1314-4/4BSAE-190	1
B02	71802129K	PACKSET FL 129/HP 129	1
B03	71825415	BOTTOM PLATE FL2 129	1
B04	71870025K	O-RING BOTTOM PLATE FL 129	1
B05	71820129	LOCKING PLATE FL 129	3
B06	01732055K	BOLT HEX M8X20X1.25 SET 3 PCS	1
B07	01732559K	WASHER SPRING M8 SET 3 PCS	1

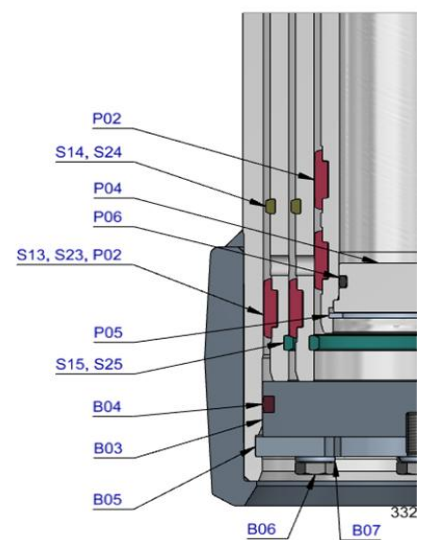

Seal kit complete

71908330K	Consists of all packsets with packset grease and O-rings
-----------	----------------------------------------------------------

Notes

The inner stopring and piston bottom are pre-mounted on spare bases, stage and pistons. Therefore, when ordering new tubes, it is not required to order these parts separately.

For repair instructions see: CYL-0040. Serial no. is located on type plate and near type plate support.